

PF3 015 Series

PF3 015 series filter cartridges are ideal for organic solvents (benzene, dimethylbenzene), corrosive fluids and wet process chemicals, with extremely low extractable.

This Photoresist filter has been designed specifically to filter point-of-use photoresist.


Recommended applications

- 1) G-line, I-line photoresists
- 2) Polyimide coatings



ITEM	SPECIFICATIONS
Filter Media	Hydrophobic PTFE / UPE Hydrophilic PTFE / UPE
Support	HDPE
Endcaps/Cage/Core	HDPE
Max. Working Temp.	70°C
Max. Operating DP	Forward 0.42 Mpa, Reverse 0.21 Mpa

Differential pressure vs. Flow rate (10" PF3/HPF3)
(— 0.05=0.05µm)

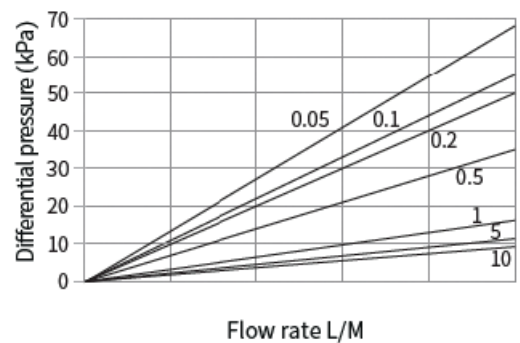

Ordering Information

ESPRO-12-PF3	010	015	05	T	/
Code	Removal Rating	Adaptor	Length	Sealing	Packaging
ESPRO-12-PF3	005 0.05 µm	015 Flat End	02 2"	E EPDM	/ Without Prewet
	010 0.10 µm		05 5"	V Viton	W Prewet Filter
ESPRO-12-015series	022 0.22 µm			S Silicone	
	045 0.45 µm			T FEP/Viton	
	10T 10.0 µm				

